

wood hydracork





Formats

1225 x 145 x 6mm
48 7/32 x 5 11/16 x 1/4"

1225 x 195 x 6mm
48 7/32 x 7 11/16 x 1/4"





Floating


RANGE	Go	   
	Essence	 
	Resist	 
	Resist ⁺	  
	Hydrocork	  


 Heavy Traffic Residential areas


 Moderate Traffic Commercial areas

 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Extra Cork

 Waterproof



Century Morocco Pine

NO PROBLEM. IT'S HYDROCORK.

hydracork READY FOR REAL LIFE



**DURABLE,
RESISTANT**
AND EASY TO MAINTAIN





100% WATERPROOF

EASY AND FAST INSTALLATION

STABLE AND STRONG INSTALLATION WITH COMPRESSION SYSTEM

PressFit is a revolutionary compression system that takes full advantage of the amazing cork properties - flexibility, elasticity and compressibility - functioning like a cork stopper

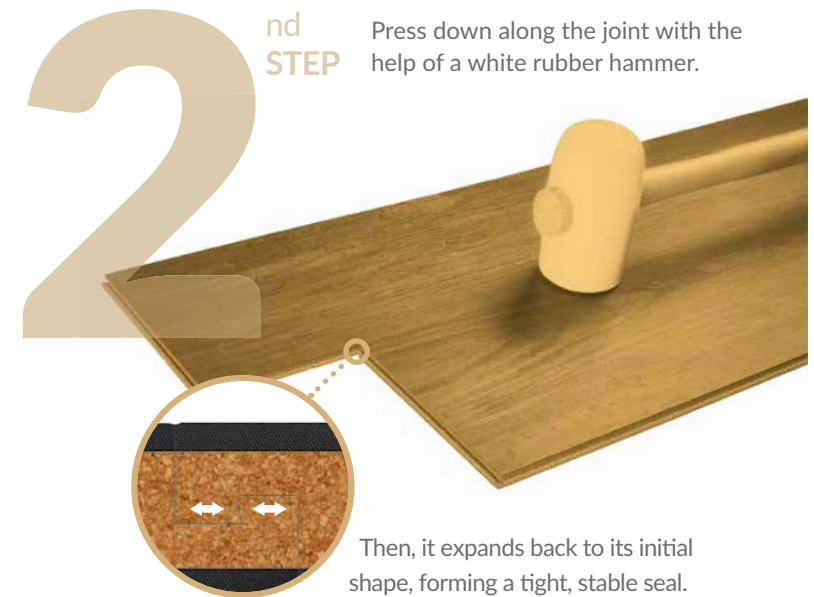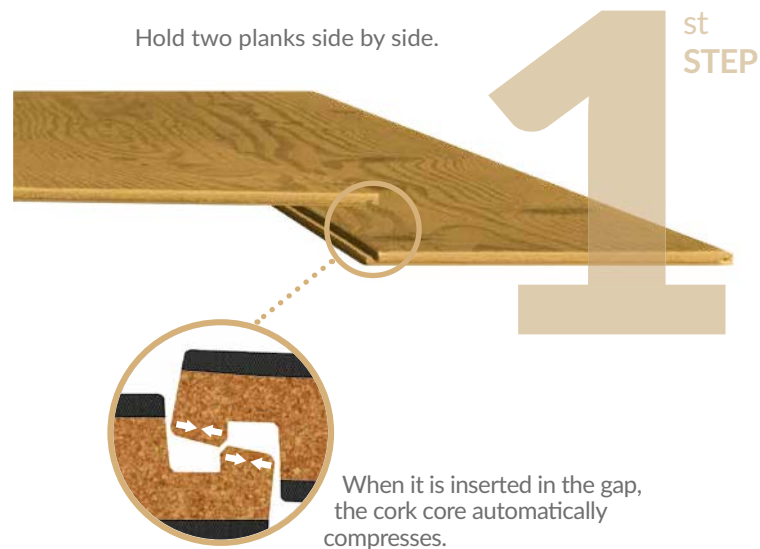

REDUCED INSTALLATION COSTS

Hydrocork is only 6mm thick making it easy to cut. Avoids the need to remove the existing skirtings or to cut doors and it can be installed on top of other flooring materials.



* Please see the terms and conditions of Wicanders Limited Warranty in the website.



Promotes global sustainability, environmental health, and safety.



Castle Raffia Oak

*B5P0001

1225 x 145 x 6mm



Castle Toast Oak

*B5P1001

1225 x 145 x 6mm



Castle Toast Oak

Tradition

No problem.
It's ready for real life.

An open plan kitchen must boast a stylish vibe and sense of wellbeing with measured sobriety.

With Hydrocork, you no longer need to be worried if the flooring is able to endure the test of time in a gracious way and how it resists impacts. You don't even need to fear over daily spillings due to its waterproof endurance.

Take advantage of it being ideal for renovations and place it on top of previously existing surfaces, or simply achieve a total look throughout your home with the same look in your kitchen, living room, bathroom and bedrooms.

Ten Traditional wood looks to choose from and complement with industrial, minimalist or even rustic designs.



European Oak

*B5Q2001

1225 x 145 x 6mm



Nature Oak

*B5T5001

1225 x 145 x 6mm



Elegant Oak

*B5R4001

1225 x 145 x 6mm



*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.





Sand Oak

*B5R1001

1225 x 145 x 6mm



Wheat Oak

B5WR001

1225 x 195 x 6mm



Linen Cherry

*B5R0001

1225 x 145 x 6mm



Light Beech

*B5T0001

1225 x 145 x 6mm



Wheat Pine

*B5R3001

1225 x 145 x 6mm

*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.



Nordic

This style is characterized by simple yet rich decor elements. Mixing different clean cut chairs can be the fun approach that will help to provide life without losing the functionality that is part of the Nordic design.



Arcadian Artic Pine
B5WT001

1225 x 195 x 6mm





Arcadian Artic Pine



Claw Silver Oak

*B5V3001

1225 x 145 x 6mm



Limed Grey Oak

*B5T7001

1225 x 145 x 6mm



Cinder Oak

*B5R7001

1225 x 145 x 6mm

*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.



Arcadian Soya Pine

*B5P4001

1225 x 145 x 6mm



Arcadian Rye Pine

*B5P5001

1225 x 145 x 6mm



Century Fawn Pine

*B5P7001

1225 x 145 x 6mm



Century Morocco Pine

*B5P6001

1225 x 145 x 6mm

Cottage

Places where life is celebrated every day.

Flooring can either be the focal point of a room, or a background that aggregates other design elements. It's important to have a clear goal in each new design project in order to guarantee a consistent layout. When you've that figured out, it's with ease that you'll be able to extend your personality into your special space.

A bedroom should mirror relaxation and comfortable atmosphere to provide only pleasant moments. For a modern Cottage style that will be wrapped up with flooring as the background, choose a darker flooring hue that will enable the other decor elements to pop up.





Alaska Oak

*B5Q0001

1225 x 145 x 6mm



Chalk Oak

*B5Q1001

1225 x 145 x 6mm



Rustic Fawn Oak

B5WU001

1225 x 195 x 6mm



Light Dawn Oak

B5WS001

1225 x 195 x 6mm



Rustic Grey Oak

B5WV001

1225 x 195 x 6mm

*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.





Reclaimed

Reclaimed wood visuals look great in a commercial space such as a boutique coffee.

The strong antique looking flooring has the ability to add history, character and personality to any space.



Sylvan Gold Oak
B5L8001

1225 x 195 x 6mm



Sylvan Brown Oak
B5WQ001

1225 x 195 x 6mm



Sawn Bisque Oak
*B5P3001

1225 x 145 x 6mm



Sawn Twine Oak
*B5P2001

1225 x 145 x 6mm

*Also available in tile format 605 x 145mm suitable for a herringbone installation. For more information please contact your supplier.



Technical solution


PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK COMPOSITE CORE WITH PRESSFIT 3MM

BALANCING VINYL LAYER

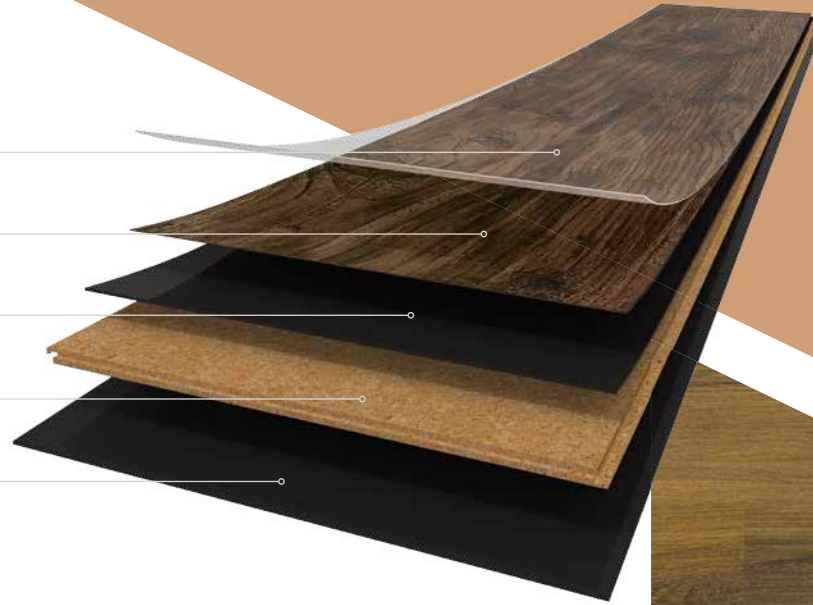

Finishing & Warranty





Suitable for Heavy Traffic Residential areas
and Heavy Traffic Commercial areas.



*Please see the terms and conditions of Wicanders Limited Warranty on the website.



Technical Data Sheet

Low thickness floating			
			0,55mm Wear Layer 1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4" 1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4" 605 x 145 x 6mm 23 13/16 x 5 11/16 x 1/4"
Level of use Domestic	ISO 10874	Class	
Level of use Commercial	ISO 10874	Class	
	Standard	Unit	Specification

General properties - ISO 10582 + EN 14085 + EN 14041

Dimensions: Width: Length:	ISO 24342	mm	+/- 0,10% up to max. 0,5 max. 2,0
Overall thickness	ISO 24346	mm	nominal +/- 0,25
Squareness	ISO 24342	mm	≤ 0,50
Straightness measured at the surface layer	ISO 24342	mm	≤ 0,30
Mass per unit area	ISO 23997	g/m²	Nominal +13% / -10%
Dimensional stability (humidity)	EN 14085 Annex C/ EN 669	mm	≤ 5
Dimensional stability and curling after exposure to heat	ISO 23999	%	≤ 0,25
Openings between panels	EN 14085 (Annex B)	mm	≤ 0,20
Height difference between panels	EN 14085 (Annex B)	mm	≤ 0,20
Flatness of the panel (Length - concave / convex)	EN 14085 (Annex A)	%	≤ 0,50 / ≤ 1,0
Flatness of the panel (Width - concave / convex)	EN 14085 (Annex A)	%	≤ 0,10 / ≤ 0,15
Residual indentation	ISO 24343-1	mm	≤ 0,1
Colour fastness	ISO 105-BO2	Blue wool scale	≥ 6

Classification properties - ISO 10582 + EN 14085

Wear layer thickness (wear layer binder content type 1)	ISO 24340	mm	0,55
Thickness swelling	ISO 24336	%	≤ 15
Castor chair	EN 425	Visual effect - after 25.000 cycles	No disturbance to the surface other than a slight change in appearance and no delamination shall occur
Simulated movement of a furniture leg	EN 424	Visual effect	No damage shall be visible after testing with a type O foot

Low thickness floating

0,55mm Wear Layer
1225 x 145 x 6mm | 48 7/32 x 5 11/16 x 1/4"
1225 x 195 x 6mm | 48 7/32 x 7 11/16 x 1/4"
605 x 145 x 6mm | 23 13/16 x 5 11/16 x 1/4"

Safety properties - EN14041

Fire resistance	ISO 11925-2/ISO 9239-1 (classification according to EN 13501-1)	Class	B _{fl} -s1
Slip resistance	EN13893	Class	DS
Formaldehyde emission	DIN EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	%	Undetectable

Additional properties

Stains resistance	ISO 26987 (a)	Grade	Grade 0 (b) Iodine grade 2 (b)
Thermal resistance	EN 12667	(m²K)/W	0,05
Impact sound reduction	ISO 140-8	dB (ΔL _w)	16 dB
Walking sound	IHD -W431	dB (A)	Reduction improvement 11,1dB Difference of loudness 51,1%
Swelling of the joints (Moisture Exposure)	IHD 423	mm	No visible effect

ASTM Standards

Airborne sound Transmission Loss	ASTM E90 /ASTM E413	STC (dB)	62 dB
Impact sound transmission	ASTM E492 /ASTM E989	IIC (dB)	61 dB
Impact sound transmission	ASTM E2179	ΔIIC	16 dB
Smoke density	ASTM662	KW/m²	Flaming & non flaming ≤ 450
Radiant panel (critical radiant flux)	ASTM E648	(W/cm²)	≥ 0,45 W/cm² Exceeds, Class I
Thermal resistance	ASTM C177	R-value (m²K)/W	0,0432
Residual indentation	ASTM F1914	%	0,4%
Static load limit	ASTM F970	in or mm	≤ 0,005 in (load of 250 lb) ≤ 0,127 mm (load of 113.4 Kg)
Ignition characteristics of finished textile floor covering systems	ASTM D2859	-	Meets the criteria



Greenguard Certification helps the identification of interior products and materials that have low chemical emissions, improving the quality of the air in which the products are used. It promotes global sustainability, environmental health, and safety.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/commercial buildings.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



Global GreenTagCert™ is an independent certification and rating scheme for green products, recognized by the Green Building Councils of Australia and New Zealand. This certification also allows the products to be listed in the Ecospecifier Global eco-products.



- (a) The following products were tested: disinfectant, C₂H₅OH, NH₄OH, citric acid, iodine, petroleum, spirit
- (b) Grade 0 - Unchanged / Grade 1 - Very little change / Grade 2 - Little change / Grade 3 - Change / Grade 4 - Strong change

Wicanders Flooring Collection is supported by a warranty. Please, read the warranty terms on www.wicanders.com

Get the best results with Wicanders accessories



Underlays

Increased comfort and insulation

To reinforce the already amazing insulation properties of cork flooring, Wicanders provides Acousticork, a cork underlay which lets you turn your home into an even cosier space.

Acousticork reduces the walking sound and heat dispersion. Overall, it makes rooms cosier and more peaceful, which is essential in making any house feel like home.

For Hydrocork products, if you wish to use underlay, please consult Wicanders website or your supplier for more information.

- High durability and long term resilience
- Increases floor thermal insulation
- Natural and sustainable product
- Easy to handle and install



Maintenance

Optimal care for an everlasting beauty

To keep your floor spotless, Wicanders has available a set of auxiliary products. Each of these has a specific purpose and is designed to make the caring of your floor as easy as possible.

Regular Maintenance



Wicanders Soft Cleaner

This mild detergent is appropriate for weekly or even daily cleaning. It can be used to remove dirt, stopping it from infiltrating in the joints and in the regular embossing of the product.



Wicanders Spray Cleaner

Designed for regular cleaning, this mild detergent has the advantage of being a spray, which makes it a quick and easy solution to apply directly on the floor. It is very effective in cleaning dirt or grease stains.



Skirtings

The perfect match to make a pleasant interior

In order to help create a more classy and harmonious interior, Wicanders provides skirting profiles to complement your floor. Create your ideal transition between the walls and the floor, whether by an exact match or contrasting colours.

Contact your supplier for information on the available skirting references.



CREATED BY HUMANS, INSPIRED BY NATURE

Wicanders represents an unique balance between the creation of innovative products and the protection of the environment, combining state-of-the-art technology with the amazing natural properties of cork.



A green production process – Cork waste resulting from the industrial process is 100% reincorporated into the production, creating an ecologically virtuous cycle.



Intensive use of biomass – The cork powder resulting from the industrial process is burned in order to create biomass which is then used as a major source of energy to supply the production facilities, allowing Wicanders also to base its production in a sustainable source of energy.



Low carbon emission – Cork's natural property of retaining CO₂ combined with an eco-sustainable industrial process allows Wicanders to develop eco-efficient products with a low carbon emissions factor, positively contributing to a sustainable environment.



Indoor Air Quality – Refined to be free of harmful phthalates Wicanders products have been awarded with worldwide indoor air quality certifications such as Greenguard Gold or A+.



Negative Global Warming Potential – The majority of Wicanders products contribute to reduce global warming, since they retain more CO₂ than they emit.

CORK - A SUSTAINABLE RAW MATERIAL

Cork comes from the bark of the Cork Oak, a slowly growing tree from the Mediterranean basin that may live for 200 years and plays a central role in the social and economic development of this region.



Truly environmental-friendly - The extraction of cork and its related industries are remarkably sustainable, since the tree is never cut or damaged during the extraction process and the bark regenerates after each harvest.



Positive ecological impact - It is estimated that the Portuguese cork oak forest - montado - is responsible for retaining 5% of the country's annual CO₂ emission, representing 4.8 million tons per year.




An activity that crosses generations - Cork Oaks are manually harvested for the first time when the tree is 25 years old and then every 9 years making it an activity that passes from generation to generation.



A positive economic and social impact - Cork harvesting is a regular and cyclical process that contributes to environmental, economic and social sustainability of the rural areas in the Mediterranean region.



Rural areas economic engine - The cork activity as well as related activities fueled by this industry create jobs in many rural areas of the country, encouraging people to settle there.

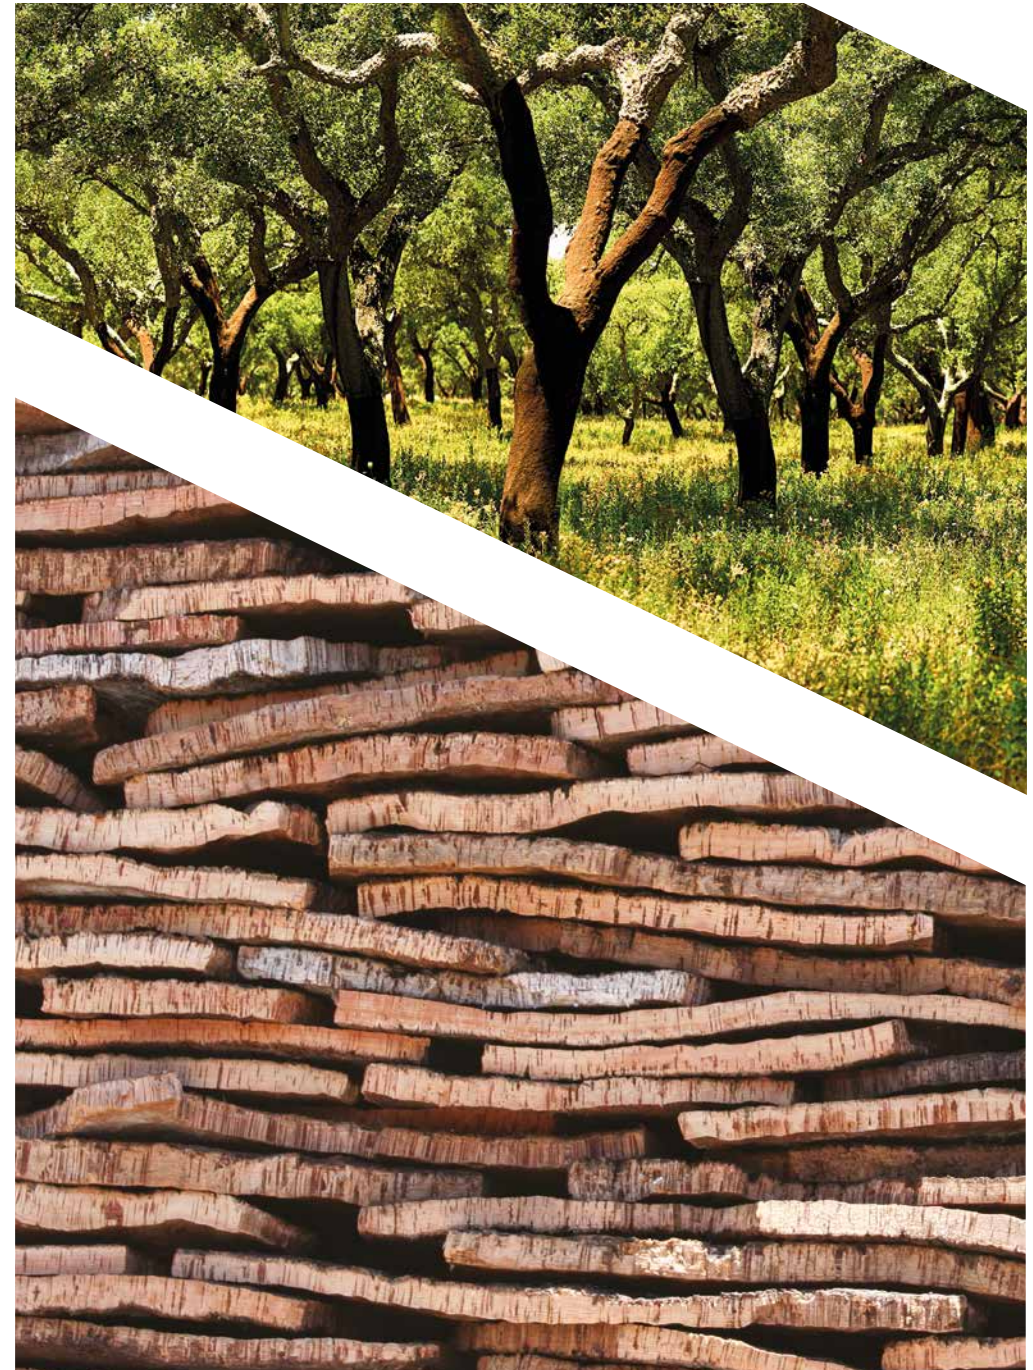

Product Selector

RANGE	Go		Essence		Resist	Resist*	hydracork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"
Alaska Oak		BOQ0003				E1Q0001	B5Q0001	
Amber Cherry		BOQ7003						
Antique Frozen Pine						E1XD001		
Antique Smoked Pine						E1XB001		
Antique Washed Pine						E1XC001		
Arcadian Artic Pine								B5WT001
Arcadian Rye Pine					B0P5001		B5P5001	
Arcadian Soya Pine					B0P4001		B5P4001	
Bark Oak		BOV8001						
Bleached Oak						E1XO001		
Blonde Oak	BON1001							
Brown Rustic Pine						E1W1001		
Brume Oak		BON8001						
Castle Raffia Oak					B0P0001		B5P0001	
Castle Toast Oak					B0P1001		B5P1001	
Century Fawn Pine					B0P7001		B5P7001	

RANGE	Go		Essence		Resist	Resist*	hydracork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8"	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"

Century Morocco Pine					B0P6001		B5P6001	
Chalk Oak		B0Q1003				E1Q1001	B5Q1001	
Cinder Oak					B0R7001	E1R7001	B5R7001	
Classic Nature Oak	B0S3001							
Classic Prime Oak				D8F4001				
Claw Silver Oak					B0V3001	E1V3001	B5V3001	
Coal Oak				D8F2001				
Country Prime Oak				D8F8001				
Croft Oak		B0V9001						
Dapple Oak				D8F1001				
Dark English Oak						E1XM001		
Dark Grey Washed Oak						E1XJ001		
Dark Red Oak						E1XL001		
Elegant Dark Oak						E1XF001		
Elegant Light Oak						E1XG001		
Elegant Oak					B0R4001	E1R4001	B5R4001	

Product Selector

RANGE	Go		Essence		Resist	Resist*	hydracork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"
European Nature Oak						E1XE001		
European Oak		BOQ2004					B5Q2001	
European Smoked Oak						E1L7001		
Fall Pine	BOS0001							
Frozen Oak		BON9001				E1N9001		
Glacier Rustic Pine			D822003					
Golden Prime Oak				D8F7001				
Grey Rustic Pine						E1W2001		
Grey Washed Oak						E1XK001		
Highland Pine	BOS1001							
Indian Dark Oak	BOS5001							
Inspired Pine			D898001					
Ivory Chalk Oak			D887001	D887002				
Ivory Salt Oak	BON2001							
Light Beech					B0T0002		B5T0001	
Light Dawn Oak								B5WS001

RANGE	Go		Essence		Resist	Resist*	hydreacork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"

Light Sucupira		B009001						
Light Washed Oak						E1XI001		
Limed Grey Oak					B0T7001	E1T7001	B5T7001	
Limed White Rustic Oak	B0WB001							
Linen Cherry					B0R0001		B5R0001	
Midnight Oak		B0M5001						
Natural Larch	B0W5001							
Nature Oak					B0T5001		B5T5001	
Nature Rustic Pine						E1XA001		
Nebraska Rustic Pine			D885001	D885002				
Nebula Oak				D8F3001				
Nordic Ash					B0V4001			
Oiled Nature Oak						E1XN001		
Oiled Taupe Oak	B0WA001							
Old Larch	B0W6001							
Platinum Chalk Oak			D886001	D886002				

Product Selector


























RANGE	Go		Essence		Resist	Resist*	hydre cork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"
Platinum Oak		BOM6001						
Polar Nature Oak	BOR9001							
Prime Arctic Oak				D8F6001				
Prime Desert Oak				D8F5001				
Prime European Cherry			D826003					
Prime Rustic Oak			D884002	D884001				
Provence Oak		BOQ3003				E1Q3001		
Quartz Larch	BOW3001							
Rustic Eloquent Oak				D8F9001				
Rustic Fawn Oak								B5WU001
Rustic Forest Oak				D8G0001				
Rustic Grey Oak								B5WV001
Rustic Limed Gray Oak					BOU0001			
Rustic Taupe Oak	BOWC001							
Sand Oak					BOR1001	E1R1001	B5R1001	
Savanna Limed Oak	BON6001							

RANGE	Go		Essence		Resist	Resist*	hydre [®] cork	
FINISHING	0,2mm Wear Layer	0,3mm Wear Layer	NPC		0,55mm Wear Layer	0,55mm Wear Layer	0,55mm Wear Layer	
CLASS OF USE (ISO 10874)	23 Residential 31 Commercial	23 Residential 32 Commercial	23 Residential 32 Commercial		23 Residential 33 Commercial	23 Residential 33 Commercial	23 Residential 33 Commercial	
BEVEL	No Bevel		No Bevel	4 Side Bevel	4 Side Micro Bevel	4 Side Micro Bevel	4 Side Micro Bevel	
DIMENSION (mm inches)	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"		1220 x 185 x 10,5mm 35 5/8 x 11 5/8 "	1830 x 185 x 11,5mm 72 x 7 1/4 x 1/2"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1220 x 185 x 10,5mm 48 x 7 1/4 x 3/8"	1225 x 145 x 6mm 48 7/32 x 5 11/16 x 1/4"	1225 x 195 x 6mm 48 7/32 x 7 11/16 x 1/4"

Sawn Bisque Oak					B0P3001		B5P3001	
Sawn Twine Oak					B0P2001		B5P2001	
Shell Oak	B0N4001							
Smoked Rustic Oak					B0U4001	E1U4001		
Sorrel Carve Oak			D838003	D838004				
Storm Oak	B0N3001							
Sylvan Brown Oak								B5WQ001
Sylvan Gold Oak								B5L8001
Washed Arcaine Oak				D8G1001				
Washed Castle Oak				D8G4001				
Washed Haze Oak				D8G2001				
Washed Highland Oak				D8G3001				
Wheat Oak								B5WR001
Wheat Pine					B0R3001		B5R3001	
White Oak		B0M8001						
White Washed Oak						E1XH001		



Wicanders' range


LOOKS			
	cork	wood	stone
RANGE	Go	  	  
	Essence	 	 
	Resist	—	  —
	Resist ⁺	  	  
	Hydrocork	—	  
	Pure	  	—
	Parquet	—	 Engineered wood

 Heavy Traffic Residential areas

 Moderate Traffic Commercial areas


 Medium Traffic Commercial areas

 Heavy Traffic Commercial areas

 Budget products

 Glue down

 Extra Cork

 Waterproof



WICANDERS®

Nature at your feet



AMORIM

HeadQuarters

Amorim Revestimentos S.A

(+351) 227 475 600

geral.ar@amorim.com

www.wicanders.com

DE	Amorim Deutschland GmbH (+49) 4221 5 93-01	germany.ar.de@amorim.com
BE NE LUX	Amorim Benelux B.V. (+31) 166 604 111	info.ar.nl@amorim.com
AT	Amorim Deutschland GmbH (+43) 1 54 51 65 10	austria.ar.de@amorim.com
CH	Amorim Flooring Switzerland AG (+41) 41 726 20 20	info@amorim.ch
PT	Amorim Revestimentos, S.A. (+351) 227 475 600	geral.ar@amorim.com
ES	Amorim Revestimentos, S.A. (+34) 902 307 407	info.ar.es@amorim.com
FR	Amorim Revestimentos, S.A. (+33) 800 914 848	info.ar.fr@amorim.com
DK	Timberman Denmark A/S (+45) 995 252 52	timberman@timberman.dk
PL	Dom Korkowy, Sp. z o.o. (+48) 126 379 639	krakow@domkorkowy.pl
US	Amorim Flooring North America (+1) 410 553 60 62	info.ar.us@amorim.com
RU	Amorim Flooring Rus, OOO (+7) 495 280 7860	info.ar.ru@amorim.com

63749MT_INT | Rev000 | Dec2017

